
TOUGH & RELIABLE EVERY INCH A HILUX



TOYOTA HILUX




TOUGH AND RELIABLE

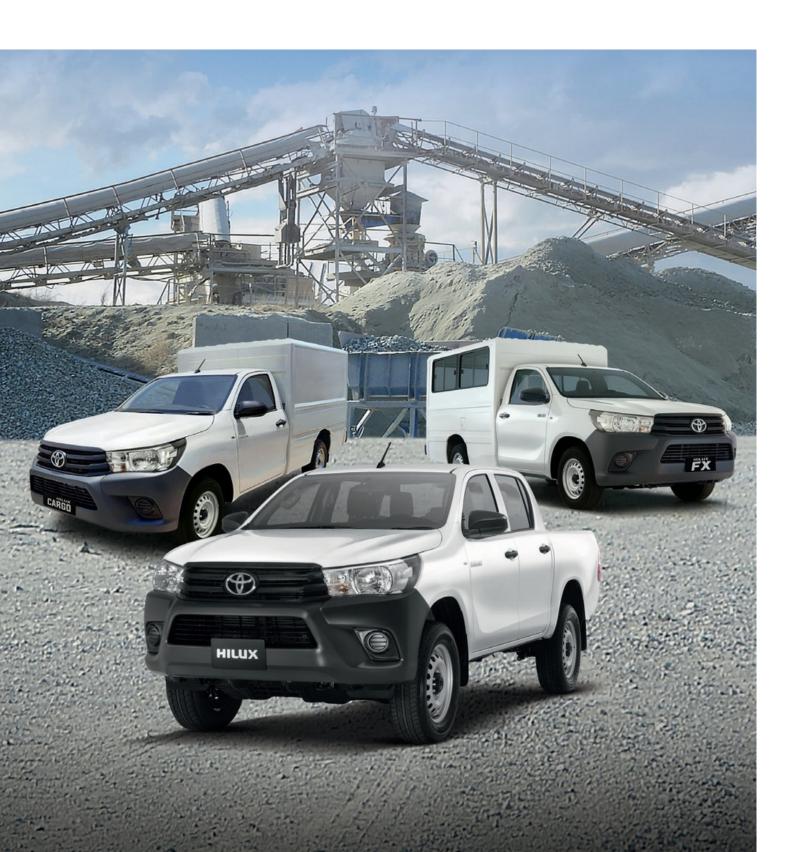

ENGINE - More Powerful and Fuel Efficient 2.4L Direct Injection Diesel Engine with 400Nm (Hilux 4X4 J) and 343 Nm (4X2 Hilux J, Hilux Cab & Chassis).



GROUND CLEARANCE - Keep Operations Going and Deliver No Matter What the Road Condition. 195mm (Hilux 4x2J) and 310mm (Hilux 4x4J)

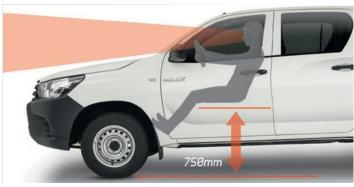


HIP POINT & DRIVER VISIBILITY - More Visibility and Ease of Entrance & Exit. (Featured in this photo is the Hilux 4x2J)



CABIN COMFORTABILITY - Comfort for Long Drives with
Airconditioning, Spacious Legroom, a USB Charger, & 2DIN Audio.



IMMOBILIZER - Precaution & Protection for Owners.



ANTI-LOCK BRAKE SYSTEM (ABS) - Security & Control on the Road.



AIRBAGS - Safety & Assurance for Passengers.

*Vehicles and specifications may vary from actual units











MODEL				HILUX			
VARIANT			J	FX	Cargo	Cab &	
VARIANT	Ī	2.4 4X2 M/T	2.4 4X4 M/T	2.4 4X2 M/T	2.4 4X2 M/T	Chassis 2.4	
		1			1	- 2	
		AL AL					
		164	-0	1	TOP		
			_ 9 9	9-1	9	9	
OVERALL DIMENSIONS			1				
Length x Width x Height	mm	5 290 v 1 800 v 1 700)5,285 x 1,800 x 1,815	5,490 x 1,800 x 2,01	4	5,070 x 1,800 x 1,690	
Payload Capacity	kg		5 910	3,430 X 1,000 X 2,01	930 1,005	1,345	
Seating Capacity	۱۸6		+ Rr: 3	Fr: 3 + Rr: 12Fr: 3	330 1,003	Fr: 3	
ENGINE &		11.2	111.5	11.5 - 11. 1211.5		11.5	
TRANSMISSION Model		0.6D 5T////	LOCD ETY/USEN OCD ETY/U				
Туре		2GD-FTV (Low)	2GD-FTV (High) 2GD-FTV L		Touch a state Attached to		
Displacement				Valve DOHC Variable Nozzle	e Turbo with Air-cooled II	ntercooler	
- Max Output			2,393 cc				
- Max Torque	PS / Rpm		150 / 3,400				
Fuel Type	Nm / Rpm	343 / 1,400 ~ 2,800	400 / 1,600 ~ 2,000343 / 1,	400 ~ 2,800			
Transmission			Diesel				
CHASSIS		5-Speed MT	6-Speed MT5-Speed MT				
Auto Disconnect Differential Differential	1	-	Wit -				
		-	h -				
Lock			Wit Fr: Doub	ole Wishbone + Rr: Leaf Sprir	ng Rigid Axle		
Suspension				lated Discs + Rr: Drum Type			
Brakes		205 / 70 B15 Charl		= -			
Tires / Wheels		205 / 70 R15 Steel 225 / 70 R17 Steel 225 / 70 R17 Steel					
Spare Tire				With			
EXTERIOR				- 11111			
Exterior color		Super White (040)					
Headlamps		Multi-Reflector Halogen					
Rear Combination Lamp		Halogen Bulb					
Outside Rear View Mirror		Manual Adjust					
Windshield Wiper		With Intermittent			With		
Tailgate Handle		Black Material		-			
Mudguards		Front + Rear		-			
INTERIOR							
Seat Material		Fabric		Vinyl			
Front Seat Adjustment		D: 4-Way Manual Adjust /		5 4 W 44 14 E 4 C 5 W 44 14 E 4			
,		P: 4-Way Manual Adjust		D: 4-Way Manual Adjust / P: 2-Way Manual Adjust			
Steering Type				Power Steering			
Steering Column		T:I+ 0 7	[elesconic	Tilt			
Steering Wheel Material		1 & 1111	Felescopic				
Assist Grip		E 1 . B . 1	T.	Urethane		1	
Cup / Bottle Holder		Fr: 4 + Rr: 4	L. Dawlahalda	Fr: 1 + Rr:		r: 1	
Illuminated Entry System	Front	Cupholder: 4	+ Bottleholder: 4		upholder: 4 + Bottleholde	er: 2	
FUNCTION				With			
Ignition System							
Drive Mode Select				Rotary Type			
Airconditioning System		-	Eco + Power -				
, conditioning system	Front			Manual Control			
	Rear	-		Manual Control -			
Audio System	Туре			2DIN			
	Function		AM /	M / Bluetooth / USB / AUX / CD			
	Speakers			2			
Accessory Outlet (12V)		Center Cluster: x1					
SAFETY							
			Delice	er + Front Passonger + Dei	r Knee		
	ı		Urive	er + Front Passenger + Drive	NIEC		
SRS Airbags							
ABS (Anti-Lock Brake System)	le .e	2 = 512 - 5 - 5	With	2 mt FID2 - 2	nt ND + Drotonsianar : '	Force Limiter	
=	Front Seats	•		3 pt. ELR x 2 + 2	pt. NR + Pretensioner + I	Force Limiter	
ABS (Anti-Lock Brake System)	Rear Seats	3 pt. ELR x 2 + Pret 3 pt. ELR x 3	With	3 pt. ELR x 2 + 2	pt. NR + Pretensioner + I	Force Limiter	













